

**Magnum**<sup>®</sup>  
wood flooring

Your supplier:



[www.magnumparket.com](http://www.magnumparket.com)

**F.I. Parquet**

Your solution for floor-heating...



**Oak Bishop – white lacquer**  
3-strip




**Oak Bishop – white lacquer**  
1-stab




**Oak Bishop**  
3-strip



**Oak Bishop**  
1-strip

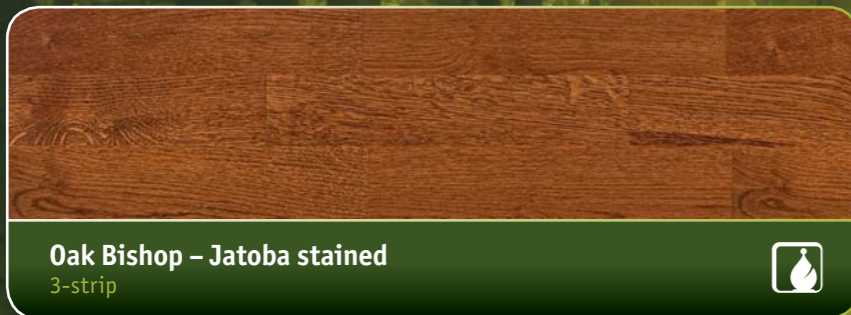


**Oak Bishop – Jatoba stained**  
3-strip

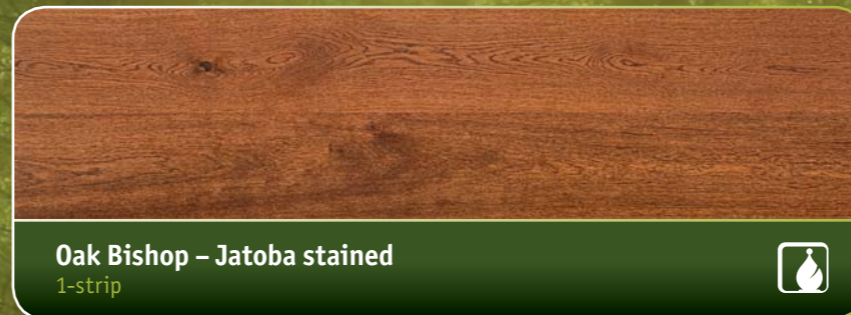

**Oak Bishop – Jatoba stained**  
1-strip



**Oak Bishop – Walnut stained**  
3-strip

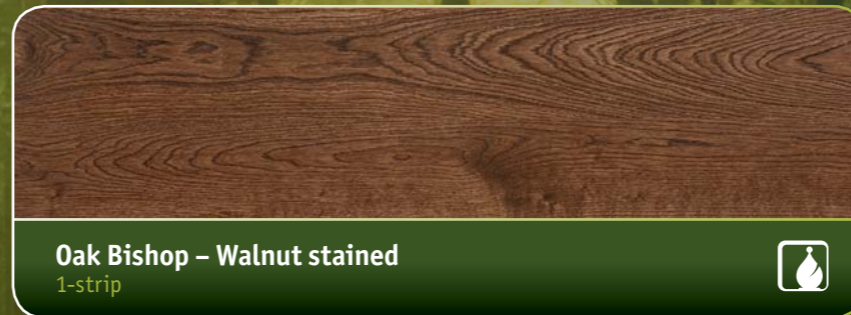

**Oak Bishop – Walnut stained**  
1-strip



**Merbau**  
3-strip



**Walnut Castle**  
3-strip



## First wooden parquet suitable for floor heating

### MAGNUM F.I.P. (Fashion Innovated Parquet)

**Thermal resistance F.I.P.:** R= 0,096 m<sup>2</sup>. K/W – Standard wooden parquet R= 0,15m<sup>2</sup>. K/W

Wood species of this collection were chosen for their mechanical-physical character that are the best to be combined with floor heating (i.e. thermal expansion, dimensional stability...) In use with OSB middle layer the thermal loss and dimensional instability risks are minimalised.


**F.I.P. –** Wooden parquet with improved product qualities supporting the use of wood mass at the same time.

- Lamella of the standard size of 2200x205x15 mm with MagLock joint.
- New look, stable form, higher hardness and resistance.
- Quick installation, easy maintenance.
- Environmentally friendly.
- Processed according to the European standard ČSN EN 13489.

When using on the floor heating it is necessary to keep provided installation instructions.

### Floor Structure

- 6 layers of UV hardened lacquer – Magshield
- Upper layer: Hardwood
- Middle layer: OSB
- Bottom layer: Spruce veneer

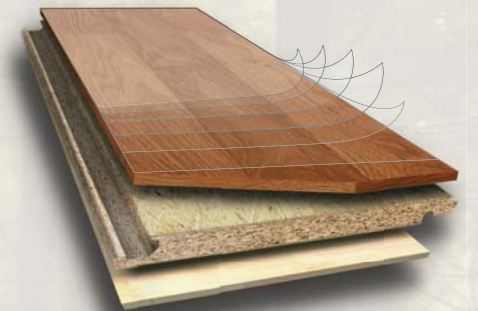

**detail – Middle layer: OSB**



### Dimensions and packaging

**Dimensions:** 2 200 mm (Length), 205 mm (Width), 15 mm (Thickness)

**Quantity:** 6 pieces per package – 2,71 m<sup>2</sup>; 40 packages on a pallet – 108,4 m<sup>2</sup>


Every package of parquet contains instructions for laying and maintenance.

**The weight of a pallet with dimensions (2 230 x 1 180 x 850 mm):**

920 kg – The pallet is covered with several layers of protective foil.

### System MagLock

**Lock –** products with the modern installation system using the glueless MagLock joint.

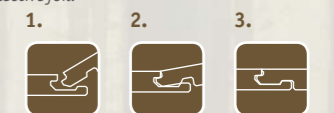

### Ecology

MAGNUM places a priority on complying with the highest environmental standards in our industry. We also apply these same standards to our suppliers. MAGNUM products are made exclusively with formaldehyde-free PVAC, 100% ecological lacquers and natural oils (for surface treatment), and the entire production process is controlled and organised in a way which eliminates any negative impact on our environment.

